

Važi od: 10.06.2026.

**ANTENALL d.o.o**

Ljiljane Krstić 24, Zemun - Altina

Tel. +381 11 6 356 356

[www.antenall.rs](http://www.antenall.rs)

[office@antenall.rs](mailto:office@antenall.rs)


# CENOVNIK

## Oprema za video nadzor HiLook serija

---



**HiLook**

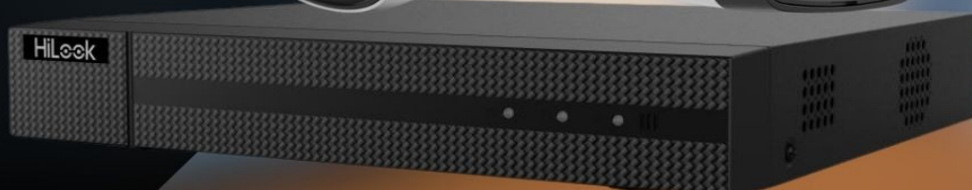

# DVR

NAZIV ARTIKLA	Kat. br.	Karakteristike	CENA EUR (gotovinski)	CENA EUR (racun bez PDV)
<p><b>DVR-204U-M1</b></p>  <p style="text-align: right;"><b>NOVO</b></p> <p style="text-align: center;"><b>HiLook</b></p>	8795	<p><b>DVR-204U-M1</b>  <b>4-KANALNI Turbo HD SNIMAČ, Motion Detection 2.0</b></p> <p>Rezolucija snimanja:              8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF              Rezolucija snimanja IP kamera: do 6MP, 2-ch ili svih 6 kanala, Enhanced IP mod:              4-ch, ili svih 8 kanala              Video kompresija: H.265 Pro+/H.265 Pro/H.265/H.264+/H.264              Audio ulazi/izlazi: 1-ch, RCA, 4-ch preko coaxial              Video izlazi: HDMI/VGA istovremeni izlaz              HDMI: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz              VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz              Alarmni ulaz/izlaz: 0/0              Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila, detekcija lica, detekcija pokreta              Dodatni ulazi: 1, RJ45 10M/100M self-adaptive Ethernet interface, 2 × USB 2.0 zadnja strana              Mrežni protokoli: TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF              Hard disk: 1 sata HDD maksimalnog kapaciteta 10TB kapaciteta. Opšte:              Napajanje 12V DC, 1.5A, Potrošnja ≤ 15 W (bez HDD)              Radna temperatura: -10 °C to +55 °C              Dimezije (DxŠxV): 260 × 222 × 45 mm              Težina: ≤ 1.16 kg (bez hard diska)</p>	148,80	124,00
<p><b>DVR-208U-M1</b></p>  <p style="text-align: right;"><b>NOVO</b></p> <p style="text-align: center;"><b>HiLook</b></p>	8796	<p><b>DVR-208U-M1</b>  <b>8-KANALNI Turbo HD SNIMAČ, Motion Detection 2.0</b></p> <p>Rezolucija snimanja:              8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF              Rezolucija snimanja IP kamera: do 6MP, 4-ch ili svih 12 kanala, Enhanced IP mod:              8-ch, ili svih 16 kanala              Video kompresija: H.265 Pro+/H.265 Pro/H.265/H.264+/H.264              Audio ulazi/izlazi: 1-ch, RCA, 4-ch preko coaxial              Video izlazi: HDMI/VGA istovremeni izlaz              HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz              VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz              Alarmni ulaz/izlaz: 0/0              Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila, detekcija lica, detekcija pokreta              Dodatni ulazi: 11, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface, 2 × USB 2.0 zadnja strana              Mrežni protokoli: TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF              Hard disk: 1 sata HDD maksimalnog kapaciteta 10TB kapaciteta. Opšte:              Napajanje 12V DC, 2A, Potrošnja ≤ 10 W (bez HDD)              Radna temperatura: -10 °C to +55 °C              Dimezije (DxŠxV): 265 × 225 × 48 mm              Težina: ≤ 1.6 kg (bez hard diska)</p>	240,00	200,00

**DVR-216Q-M1**

HiLook

8794

**DVR-216Q-M1  
16-KANALNI Turbo HD SNIMAČ, Motion Detection 2.0**

Rezolucija snimanja:  
 Kada je režim 1080p Lite nedostupan:  
 4 MP lite/1080p/720p/VGA/WD1/4CIF/CIF  
 Kada je režim 1080p Lite dostupan:  
 4 MP lite/3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF  
 Rezolucija snimanja IP kamera: do 6MP, 2-ch ili svih 18 kanala, Enhanced IP mod:  
 8-ch, ili svih 24 kanala  
 Video kompresija: H.265 Pro+/H.265 Pro/H.265/H.264+/H.264  
 Audio ulazi/izlazi: 1-ch, RCA, 16-ch preko coaxial  
 Video izlazi: HDMI/VGA istovremeni izlaz  
 HDMI: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz  
 VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz  
 Alarmni ulaz/izlaz: 0/0  
 Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila, detekcija lica, detekcija pokreta  
 Dodatni ulazi: 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface, 2 × USB 2.0 zadnja strana  
 Mrežni protokoli: TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF  
 Hard disk: 1 sata HDD maksimalnog kapaciteta 10TB kapaciteta. Opšte:  
 Napajanje 12 VDC, 1.9 A, Potrošnja ≤ 20 W (bez HDD)  
 Radna temperatura: -10 °C to +55 °C  
 Dimezije (DxŠxV): 265 × 225 × 48 mm  
 Težina: ≤ 1.2 kg (bez hard diska)

240,00

200,00

**DVR-216U-M2**

HiLook

8797



**DVR-216U-M2  
16-KANALNI Turbo HD SNIMAČ, Motion Detection 2.0**

Rezolucija snimanja:  
 8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF  
 Rezolucija snimanja IP kamera: do 6MP, 8-ch ili svih 24 kanala, Enhanced IP mod:  
 16-ch, ili svih 32 kanala  
 Video kompresija: H.265 Pro+/H.265 Pro/H.265/H.264+/H.264  
 Audio ulazi/izlazi: 1-ch, RCA, 16-ch preko coaxial  
 Video izlazi: HDMI/VGA istovremeni izlaz  
 HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz  
 VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz  
 Alarmni ulaz/izlaz: 0/0  
 Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila, detekcija lica, detekcija pokreta  
 Dodatni ulazi: 11, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface, 1 × USB 2.0 prednja strana, 1 × USB 3.0 zadnja strana  
 Mrežni protokoli: TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF  
 Hard disk: 2 sata HDD maksimalnog kapaciteta 10TB kapaciteta po disku.  
 Opšte: Napajanje 12V DC, 5A, Potrošnja ≤ 25 W (bez HDD)  
 Radna temperatura: -10 °C to +55 °C  
 Dimezije (DxŠxV): 380 × 320 × 48 mm  
 Težina: ≤ 2 kg (bez hard diska)



487,20

406,00

# NVR

NAZIV ARTIKLA	Kat. br.	Karakteristike	CENA EUR (gotovinski)	CENA EUR (racun bez PDV)
<p><b><u>NVR-104MH-C</u></b></p>  <p style="text-align: right;"><b>NOVO</b></p> <p style="text-align: center;"><b>HiLook</b></p>	8798	<p><b>NVR-104MH-C</b> <b>4-Kanalni Mrežni Snimač</b></p> <p>Rezolucija snimanja: 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF            Video kompresija: H.265/H.265+/H.264+/H.264            Audio izlazi: 1-ch, RCA            Tip strima: Video, Video &amp; Audio            Video izlazi: HDMI/VGA istovremeni izlaz            HDMI: 1-ch, 4K (4096 x 2160)/30 Hz, 4K (3840 x 2160)/30 Hz, 2K (2560 x 1440)/60 Hz, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz            VGA: 1-ch, 1920 x 1080/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz            Alarmni ulaz/izlaz: 0/0            Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila (1-ch), podržava višestruke događaje video sadržaja analitike (VCA), podesive pametne funkcije kamere, poput detekcije VCA (pokret, prelazak linije, upad, itd.)            Dodatni ulazi: 2 x USB 2.0 zadnja strana            Interfejs: 1 RJ-45 10 /100 Mbps self-adaptive Ethernet interface            Incoming/Outgoing Bandwidth: 40/80 Mbps            Mrežni protokoli: TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS            Hard disk: 1 sata HDD maksimalnog kapaciteta 8TB            Napajanje i potrošnja: 12 VDC, 1.5 A, ≤ 10 W (bez HDD-a)            Radna temperatura: -10 °C to +55 °C            Dimezije (DxŠxV): 265 x 225 x 48 mm            Težina: ≤ 1 kg</p>	108,00	90,00
<p><b><u>NVR-116MH-C</u></b></p>  <p style="text-align: right;"><b>NOVO</b></p> <p style="text-align: center;"><b>HiLook</b></p>	8800	<p><b>NVR-116MH-C</b> <b>16-Kanalni Mrežni Snimač</b></p> <p>Rezolucija snimanja: 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF            Video kompresija: H.265/H.265+/H.264+/H.264            Audio izlazi: 1-ch, RCA            Tip strima: Video, Video &amp; Audio            Video izlazi: HDMI/VGA istovremeni izlaz            HDMI: 1-ch, 4K (4096 x 2160)/30 Hz, 4K (3840 x 2160)/30 Hz, 2K (2560 x 1440)/60 Hz, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz            VGA: 1-ch, 1920 x 1080/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz            Alarmni ulaz/izlaz: 0/0            Pametne funkcije: Motion Detection 2.0 prepoznavanje čoveka/vozila (4-ch), podržava višestruke događaje video sadržaja analitike (VCA), podesive pametne funkcije kamere, poput detekcije VCA (pokret, prelazak linije, upad, itd.)            Dodatni ulazi: 2 x USB 2.0 zadnja strana            Interfejs: 1 RJ-45 10 /100/1000 Mbps self-adaptive Ethernet interface            Incoming/Outgoing Bandwidth: 160/80 Mbps            Mrežni protokoli: TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS            Hard disk: 1 sata HDD maksimalnog kapaciteta 8TB            Napajanje i potrošnja: 12 VDC, 1.5 A, ≤ 10 W (bez HDD-a)            Radna temperatura: -10 °C to +55 °C            Dimezije (DxŠxV): 265 x 225 x 48 mm            Težina: ≤ 1 kg</p>	141,60	118,00

# HILOOK KAMERE

NAZIV ARTIKLA	Kat. br.	Karakteristike	CENA EUR (gotovinski)	CENA EUR (racun bez PDV)
<p><b><u>THC-T150-M 2,8mm</u></b></p>  <p>HiLook</p>	7557	<p><b>THC-T150-M 2,8mm</b>  <b>5 Mpx Fiksna Turret Kamera</b>                      Rezolucija snimanja: 2560 × 1944 @ 20 fps                      Osetljivost: Color: 0.01 Lux @ (F2.0, AGC ON), 0 Lux with IR                      Signalni prekidač: TVI/AHD/CVI/CVBS                      IC osvetljenje: smart IR do 20 m                      Ostale karaktersike: DWDR, BLC, HLC, Mirror, D/N mod                      Napajanje i potrošnja: 12 VDC ±25%, max 4.3 W                      Radna temperatura i nivo zaštite: -40 °C do +60 °C, IP 66                      Dimenzije i težina: Ø 82.6 mm × 69.66 mm, 230g  <b>Kompatibilni pribor:</b> DS-1280ZJ-XS, DS-1H18, DS-1272ZJ-110-TRS, DS-1275ZJ-SUS, DS-1276ZJ-SUS</p>	43,20	36,00
<p><b><u>IPC-D620HA-LZU 2.8-12mm</u></b></p>  <p>HiLook</p>	8783	<p><b>IPC-D620HA-LZU 2.8-12mm</b>  <b>2 MP Dual Light MD 2.0 Verifokal Dom Mrežna Kamera</b>                      Rezolucija snimanja: 1920 × 1080 @30fps                      Senzor slike: 1/2.9" Progressive Scan CMOS                      Osetljivost: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR                      FOV (Polje vidljivosti): horizontalno 102.4° do 31.2°, vertikalno 54.4° do 17.5°, dijagonalno 121.8° to 35.7°                      Unapređenje slike: D WDR, BLC, HLC, 3D DNR                      Osvetljenje: Bela svetlost i IR, dometa do 30m                      Interfejsi: 1 RJ45 10 M/100 M self-adaptive Ethernet port, Integrisani mikروفon, reset dugme, slot za SD karticu do 512 Gb                      Protokoli: TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IGMP, IPv6, UDP, QoS, FTP, SMTP                      Mrežni standardi: Open Network Video Interface (Profile S, Profile G, Profile T), ISAPI, SDK                      Događaji: Detekcija pokreta (podrška za alarmiranje putem određenih vrsta ciljeva (čovjek i vozilo)), alarm za ometanje video zapisa, izuzetak                      Napajanje i potrošnja: 12 VDC ± 25%, 0.8 A, max. 9.6 W; PoE: IEEE 802.3af, Class 3, max. 12 W                      Radna temperatura: -30°C to 60°C                      Zaštita: IP67: IEC 60529-2013                      Dimenzije: Ø121.5 mm × 97.6 mm                      Materijal: Metal i plastika                      Težina: 540 g  <b>Kompatibilni pribor:</b>                      DS-1280ZJ-DM46, DS-2280ZJ-WA120, DS-1272ZJ-120, DS-1272ZJ-120B, DS-1271ZJ-120, DS-2200ZJ-WA-120, DS-2200ZJ-WAJ-120, DS-2210ZJ-WA-120, DS-1275ZJ-SUS, DS-1276ZJ-SUS</p>	180,00	150,00

**IPC-B620HA-LZU 2.8-12mm**

HiLook

8778

**IPC-B620HA-LZU 2.8-12mm****2 MP Dual Light MD 2.0 Verifokal Bullet Mrežna Kamera**

Rezolucija snimanja: 1920 × 1080 @30fps  
 Senzor slike: 1/2.9" Progressive Scan CMOS  
 Osetljivost: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR  
 FOV (Polje vidljivosti): horizontalno 102.4° do 31.2°, vertikalno 54.4° do 17.5°, dijagonalno 121.8° to 35.7°  
 Unapređenje slike: D WDR, BLC, HLC, 3D DNR  
 Osvetljenje: Bela svetlost i IR, dometa do 50m  
 Interfejsi: 1 RJ45 10 M/100 M self-adaptive Ethernet port, Integrisani mikrofoni, reset dugme, slot za SD karticu do 512 Gb  
 Protokoli: TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IGMP, IPv6, UDP, QoS, FTP, SMTP  
 Mrežni standardi: Open Network Video Interface (Profile S, Profile G, Profile T), ISAPI, SDK  
 Događaji: Detekcija pokreta (podrška za alarmiranje putem određenih vrsta ciljeva (čovjek i vozilo)), alarm za ometanje video zapisa, izuzetak  
 Napajanje i potrošnja: 12 VDC ± 25%, 0.9 A, max. 11 W,; PoE: IEEE 802.3af, Class 3, max. 12.9 W  
 Radna temperatura: -30°C to 60°C  
 Zaštita: IP67: IEC 60529-2013  
 Dimenzije: Ø105 mm × 252 mm  
 Materijal: Metal i plastika  
 Težina: 565 g

**Kompatibilni pribor:**

DS-1280ZJ-S, DS-1260ZJ, DS-1275ZJ-SUS, DS-1276ZJ-SUS, DS-1275ZJ-S-SUS

180,00

150,00

**IPC-D640HA-LZU 2.8-12mm**

HiLook

8784

**IPC-D640HA-LZU 2.8-12mm****4 MP Dual Light MD 2.0 Verifokal Dom Mrežna Kamera**

Rezolucija snimanja: 2560 × 1440 @20fps  
 Senzor slike: 1/3 " Progressive Scan CMOS  
 Osetljivost: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR  
 FOV (Polje vidljivosti): horizontalno 96.7° do 29.7°, vertikalno 51.7° do 16.7°, dijagonalno 114.3° do 34°  
 Unapređenje slike: WDR, BLC, HLC, 3D DNR  
 Osvetljenje: Bela svetlost i IR, dometa do 30m  
 Interfejsi: 1 RJ45 10 M/100 M self-adaptive Ethernet port, Integrisani mikrofoni, reset dugme, slot za SD karticu do 512 Gb  
 Protokoli: TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IGMP, IPv6, UDP, QoS, FTP, SMTP  
 Mrežni standardi: Open Network Video Interface (Profile S, Profile G, Profile T), ISAPI, SDK  
 Događaji: Detekcija pokreta (podrška za alarmiranje putem određenih vrsta ciljeva (čovjek i vozilo)), alarm za ometanje video zapisa, izuzetak  
 Napajanje i potrošnja: 12 VDC ± 25%, 0.8 A, max. 9.6 W; PoE: IEEE 802.3af, Class 3, max. 12 W  
 Radna temperatura: -30°C to 60°C  
 Zaštita: IP67: IEC 60529-2013  
 Dimenzije: Ø121.5 mm × 97.6 mm  
 Materijal: Metal i plastika  
 Težina: 540 g

**Kompatibilni pribor:**

DS-1280ZJ-DM46, DS-2280ZJ-WA120, DS-1272ZJ-120, DS-1272ZJ-120B, DS-1271ZJ-120, DS-2200ZJ-WA-120, DS-2200ZJ-WAJ-120, DS-2210ZJ-WA-120, DS-1275ZJ-SUS, DS-1276ZJ-SUS

202,80

169,00